

# JUNG



Unique effects in metal and lacquer

*Anthracite*



# Anthracite


Modern architecture wants to set markers which reflect the present and also hold good for the future.

The new anthracite range from JUNG forges this link through the synthesis of form, function and materials: It combines timeless elegance with lasting quality in a unique way.

Pioneering architectural ideas can thus be implemented universally. The anthracite range formally continues the successful design of the JUNG LS lines.

The minimalist square with its clear, practical design idiom loses nothing of its effect. The classical geometric shape in fact now has added charm:

**By combining the real aluminium material with lacquer in anthracite, a unique finish with a cool metallic effect is achieved.**

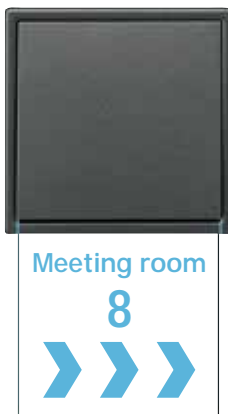

# JUNG



Anthracite is persuasive due to its design and quality of materials as well as the comprehensive range of applications. The variety of applications of this innovative range extends from KNX/EIB to the management of lighting, radio

and blinds and includes temperature control.

A universal IP 44 installation can also be implemented with the versatile devices: Only one additional sealing element is necessary to achieve a splash-proof version.




The elements can easily be assembled due to the modular principle.

The new range is available in a classic variant with simple LS frames.


























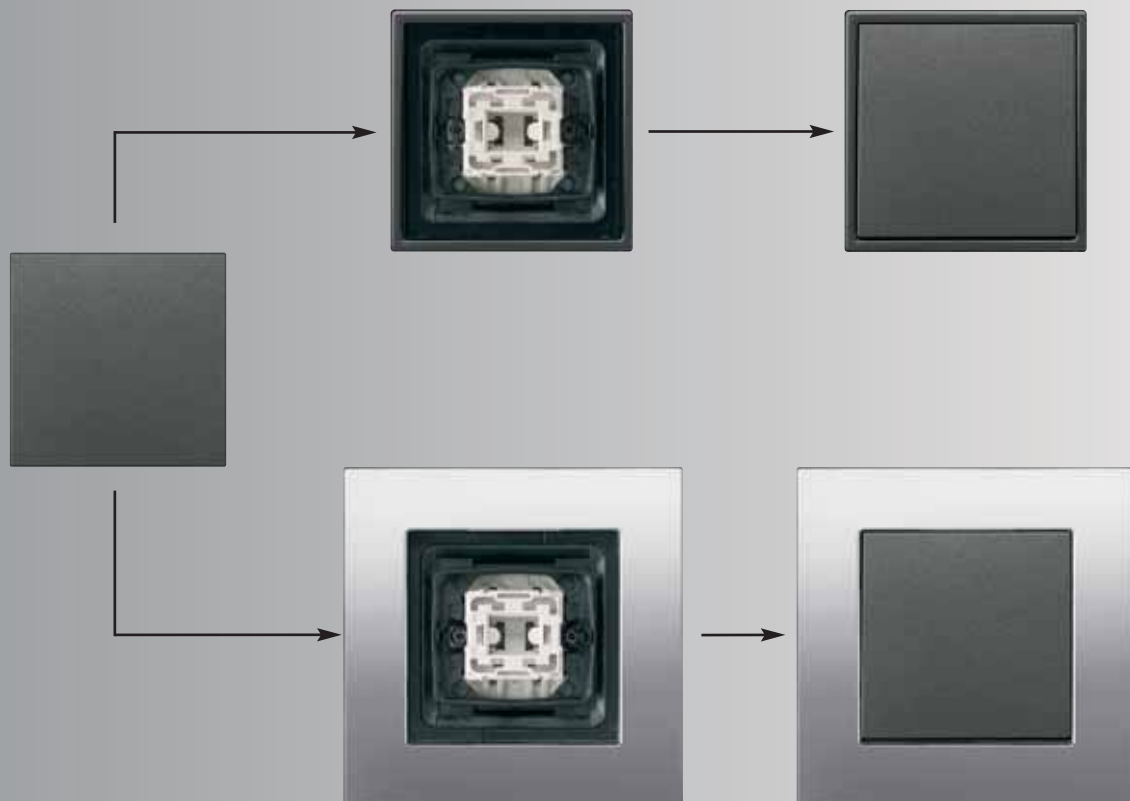


In particular, the LS plus combination in anthracite with polished chrome frames is suitable as a representative style.

With the new JUNG design range, any architectural concept can be achieved.




# Overview of available devices

\* with sealing gasket ref.-no. 551 WU the protection level IP 44 is ensured.  
 \*\* material: non-metal, lacquered

	Rocker for 1-gang switch and push-button inserts AL 2990 AN*		SCHUKO-socket 45° 10 – 16 A / 250 V, German system screwless connect. terminals AL 2520-45 AN
	Rocker for 1-gang switch and push-button inserts with inscription plate 12 x 55 mm AL 2990 NA AN*		2-gang SCHUKO-socket 16 A-AC / 10 A-DC / 250 V 2-pole + earth, German system with child protection screwless connect. terminals AL 5020 KI-L AN screw connect. terminals AL 5022 KI-L AN
	Rocker with diffused lightoutlet for 1-gang switch and push-button inserts with pilot light AL 2990 KO2 AN*		SCHUKO-socket 10 – 16 A / 250 V, German system with pilot light and inscription plate 12 x 55 mm screw connect. terminals AL 2520 NAKO AN
	Rocker with transparent lens for 1-gang switch and push-button inserts AL 2990 KO5 AN*		SCHUKO-socket 10 – 16 A / 250 V, German system with overvoltage protection, child protection and inscription plate screw connection terminals AL 2521 KINAUF AN
	Rocker with transparent lens for 1-gang switch with inscription plate AL 2990 NAKO5 AN*		Socket outlet 2-pole + earth, 13 A / 250 V British system with child protection screw connection terminals AL 2521 BS AN
	Rocker for 1-gang switch and push-button inserts with symbol "light" AL 2990 L AN*		Socket outlet 2-pole + earth, 13 A / 250 V British system, with switch with child protection, screw connection terminals without pilot light AL 2172 AN dto., with pilot light AL 2172 KO AN
	Rocker for 1-gang switch and push-button inserts with symbol "bell" AL 2990 K AN*		
	Rocker for 1-gang switch and push-button inserts with symbol "door" AL 2990 T AN*		
	Rocker with transparent cover 52 x 70 mm for inscription or decorative foils for 1-gang switch- and push-button inserts AL 2990 NA1 AN*		Socket outlet 2-pole + earth pin, 10 – 16 A / 250 V French/Belgian system screwless connect. terminals AL 2520 F AN screw connect. terminals AL 2521 F AN dto., with child protection screwless connect. terminals AL 2520 FKI AN screw connect. terminals AL 2521 FKI AN
	Rocker for 2-gang switch and push-button inserts AL 2995 AN*		dto., with inscription plate 12 x 55 mm screwless connect. terminals AL 2520 FKINA AN dto., with child protection screw connect. terminals AL 2521 FKINA AN
	Rocker for 2-gang switch and venetian blind switch inserts AL 2995 P AN*		SCHUKO-sockets 10 – 16 A / 250 V German system, with hinged lid screwless connect. terminals AL 2520 KL AN* screw connect. terminals AL 2521 KL AN*
	Rocker with 2 transparent lenses for 2-gang switch inserts 505 KOU 5, 505 KOVU 5 AL 2995 KO5 AN*		dto., with inscription plate 12 x 55 mm screwless connect. terminals AL 2520 NAKL AN*
	Center plate with knob for rotary, time delay and venetian blind switch/push-button inserts AL 2941 AN*		Center plate with knob for rotary dimmer and potentiometer inserts AL 2940 AN*
	SCHUKO-sockets anthracite 10 – 16 A / 250 V, German system screwless connect. terminals AL 2520 AN screw connect. terminals AL 2521 AN dto., with child protection screwless connect. terminals AL 2520 KI AN screw connect. terminals AL 2521 KI AN		Center plate with knob for speed regulator insert 245.20 AL 2940.20 AN*
	dto., with inscription plate 12 x 55 mm screwless connect. terminals AL 2520 NA AN dto., with child protection screwless connect. terminals AL 2520 KINA AN		Center plate for touch dimmer and electronic switch inserts standard AL 1561.07 AN universal AL 1561.07 U AN with radio-receiver AL 1561.07 F AN

# Overview of available devices




Flat radio-controlled wall-mounted transmitter


1 channel	AL 41 F AN**
2 channel	AL 42 F AN**
4 channel	AL 44 F AN**




Center plate for key switch/  
key push-button inserts AL 2928 AN




Center plate for key switch/  
key push-button inserts  
flat version AL 2925 AN




Key Card Holder AL 2990 CARD AN\*\*




Center plate for  
1 BNC- or 1 loudsp. socket AL 2962-1 AN  
2 BNC- or 2 loudsp. sockets AL 2962-2 AN




Blank center plate  
for snap-on fixing AL 2994 B AN\*




Center plate for  
TV/FM sockets AL 2990 TV AN  
TV/FM/SAT sockets AL 2990 SAT AN




Cable outlet  
with center plate and insert 190 A AL 2990 A AN



Center plate  
for commanding appliances  
with Ø 22.5 mm AL 2964 AN




Automatic switch  
lens type 1.10 m  
standard version AL 1180 AN\*\*  
universal version AL 1180-1 AN\*\*




Cover plate for UAE-sockets  
1 x 8 pole AL 2969-1 UA AN  
dto., with inscription plate AL 2969-1 NAUA AN



Automatic switch  
lens type 2.20 m  
standard version AL 1280 AN\*\*  
universal version AL 1280-1 AN\*\*




Center plate for UAE-sockets  
2 x 8 pole AL 2969-2 UA AN  
dto., with inscription plate AL 2969-2 NAUA AN




Electronic time delay switch  
with astro mode AL 5201 T AN




Data connection cap  
with inscription plate AL 2554 AN\*\*



Center plate for motor control inserts  
with anti lock-out function AL 5232 AN  
dto., with terminal for sensors AL 5232 S AN




Center plate  
for pilot light inserts AL 2937 AN



Center plate for motor control inserts  
with memory function AL 5232 M AN  
dto., with terminal for sensors AL 5232 MS AN




LED pilot light with short decal information  
dimension of complete device 71 x 142 mm  
version with white LEDs AL 2539 N71 AN LEDW  
version with blue LEDs AL 2539 N71 AN LEDB




Center plate for motor control inserts  
with radio controlled receiver AL 5232 F AN  
dto., with terminal for sensors AL 5232 FS AN




LED pilot light with long decal information  
dimension of complete device 71 x 213 mm  
version with white LEDs AL 2539 N142 AN LEDW  
version with blue LEDs AL 2539 N142 AN LEDB




Center plate for motor control inserts  
with timer function standard  
standard version AL 5232 ST AN



LED pilot light  
with white and blue LEDs AL 2539 AN LEDWB




Center plate for motor control inserts  
with timer function universal AL 5232 T3 AN\*\*  
dto., with terminal for sensors AL 5232 TS3 AN\*\*



LED red/green pilot light  
with two light pads AL 2539-2 AN LEDWB


\* with sealing gasket ref.-no. 551 WU the protection level IP 44 is ensured.  
 \*\* material: non-metal, lacquered




LED floor pilot light  
with white LEDs AL 2539-O AN LEDW




SCHUKO-socket 16 A, 250 V -,  
with child protection  
with white LED floor pilot light AL 2520-O LEDW AN




Center plate  
for room thermostat insert  
TR 231 U + TR 241 U AL TR 231 PL AN



Center plate  
for room thermostat insert  
TR 236 U AL TR 236 PL AN




Center plate  
for floor thermostat insert  
FTR 231 U AL FTR 231 PL AN




Timer thermostat display AL UT 238 D AN  
Radio timer thermostat display AL HLK-FT AN




KNX/EIB  
room temperature sensor AL 2177 AN




KNX/EIB push-button sensor  
Standard version  
1-gang AL 2071 NABS AN\*\*  
2-gang AL 2072 NABS AN\*\*  
4-gang AL 2074 NABS AN\*\*  
Universal version  
1-gang AL 2091 NABS AN\*\*  
2-gang AL 2092 NABS AN\*\*  
4-gang AL 2094 NABS AN\*\*




KNX/EIB light mood push-button sensor  
8-gang AL 2094 LZ AN\*\*




KNX/EIB universal push-button sensor  
4-gang, radio-controlled AL 2094 F AN\*\*




KNX/EIB automatic switch  
for bus coupling unit 2070 U  
standard version  
lens type 1.1 m AL 3180 AN\*\*  
lens type 2.2 m AL 3280 AN\*\*




universal version  
lens type 1.1 m AL 3180-1 AN\*\*  
lens type 2.2 m AL 3280-1 AN\*\*




KNX/EIB Info display AL 2041 AN\*\*




KNX/EIB Bluetooth-Gateway  
(incl. bus coupling unit 2070 U) AL BG 2041 AN\*\*




KNX/EIB room controller display  
(incl. bus coupling unit 2070 U)  
3-gang RCD AL 2021 AN\*\*  
4-gang RCD AL 2022 AN\*\*  
5-gang RCD AL 2023 AN\*\*  
6-gang RCD AL 2024 AN\*\*  
8-gang RCD AL 2044 AN\*\*




Surface cap with integrated frame  
(for devices with mx. 33 mm installation depth)  
1-gang, 81 x 81 x 44 mm AL 2981 A-L AN\*\*  
2-gang, 152 x 81 x 44 mm AL 2982 A-L AN\*\*  
3-gang, 223 x 81 x 44 mm AL 2983 A-L AN\*\*



Sealing gasket for all devices  
available in IP 44 551 WU  
Sealing gasket for center plate  
AL 2940 AN in IP 44 40 D







Center plate with hinged lid for devices  
with plate 50 x 50 mm AL 2990 KL AN\*



Frames  
for vertical and horizontal installation

1-gang 81 x 81 mm AL 2981 AN  
2-gang 81 x 152 mm AL 2982 AN  
3-gang 81 x 223 mm AL 2983 AN  
4-gang 81 x 294 mm AL 2984 AN  
5-gang 81 x 365 mm AL 2985 AN

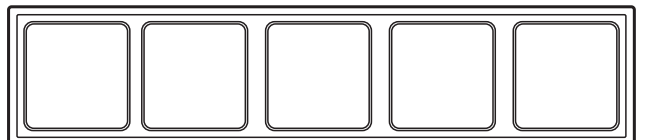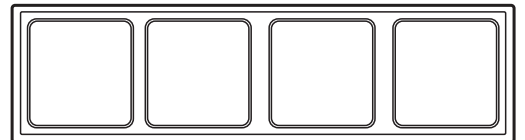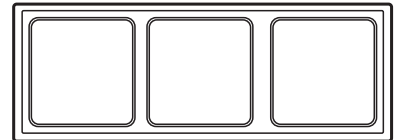

# JUNG

P-GB-ALAN 05 4 011377 017245



ALBRECHT JUNG GMBH & CO. KG  
P.O. Box 1320  
D-58569 Schalksmühle  
Germany  
Phone: +49.23 55.80 65 53  
Fax: +49.23 55.80 62 54  
E-mail: [mail.vka@jung.de](mailto:mail.vka@jung.de)  
Internet: [www.jung.de](http://www.jung.de)

For sales contacts in your country see:  
[www.jung-salescontact.com](http://www.jung-salescontact.com)